

NEW

220/RM 600-800



REMOVABLE BOLLARDS

The removable bollards 220/RM 600 and 220/RM 800 are typically used to prevent the parking of unauthorised vehicles, transit and access by unauthorised vehicles in driveways, and protection of shatter-proof windows. Because of the removal procedure, it is recommended to choose the removable bollards only if the amount of daily movements is limited (otherwise the automatic bollards should be used) or when the installation depth does not allow for the installation of the automatic bollards.



Anticorrosion marine treatment



PILOMAT
HÖRMANN
100% MADE IN ITALY

PAG.1/2

PILOMAT s.r.l.
www.pilomat.com | pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2023© Pilomat S.r.l. All rights reserved

REVIEW

28/03/2023

Information in this document is for reference only. In pursuit of its policy of continuous refinement and improvement, Pilomat reserves the right to amend this information at any time and without prior notice.
Picture shown is for illustration purpose only.

220/RM 600-800




AVAILABLE ITEMS

- BOLLARD 220/RM FEV – NORMAL STEEL PAINTED equipped with 2 EU lock keys
- BOLLARD 220/RM IXS – STAINLESS STEEL BRUSHED equipped with 2 EU lock keys
- BOLLARD 220/RM IXV – STAINLESS STEEL PAINTED equipped with 2 EU lock keys
- ADHESIVE REFLECTING STRIP - STANDARD: RED/WHITE (PILOMAT LOGO) - OPTIONAL: WHITE (NO LOGO)
- PAINTING WITH RAL COLOUR ON REQUEST
- ADDITIONAL KEY FOR EU LOCK (normal steel - stainless steel brushed)
- ADDITIONAL EU PROFILE LOCK WITH IDENTICAL KEYS (installation with several bollards)



	220/RM-600	220/RM-800
CYLINDER MATERIAL	S235JR NORMAL STEEL - X5CrNi 18-10 (AISI 304) STAINLESS STEEL	
CYLINDER DIAMETER	220mm	
CYLINDER HEIGHT	600mm	800mm
CYLINDER THICKNESS	4mm	
NORMAL STEEL CYLINDER FINISH	ANTI-CORROSION TREATMENT - STANDARD PAINTING GREY ANTHRACITE	
STAINLESS STEEL CYLINDER FINISH	GREY ANTHRACITE STANDARD PAINTING OR BRUSHING	
REFLECTING ADHESIVE STRIP	STANDARD - HEIGHT 55mm	
IMPACT RESISTANCE (WITHOUT DEFORMATION)	30.000 J	
BREAKOUT RESISTANCE	150.000 J	
OPERATING TEMPERATURE	-40 °C +70 °C	
BOLLARD WEIGHT (WITHOUT BASEMENT)	19Kg	23Kg
BASEMENT WEIGHT	13Kg	
STANDARD LOCK	EUROPEAN PROFILE HALF CYLINDER ACCORDING TO DIN 18252	

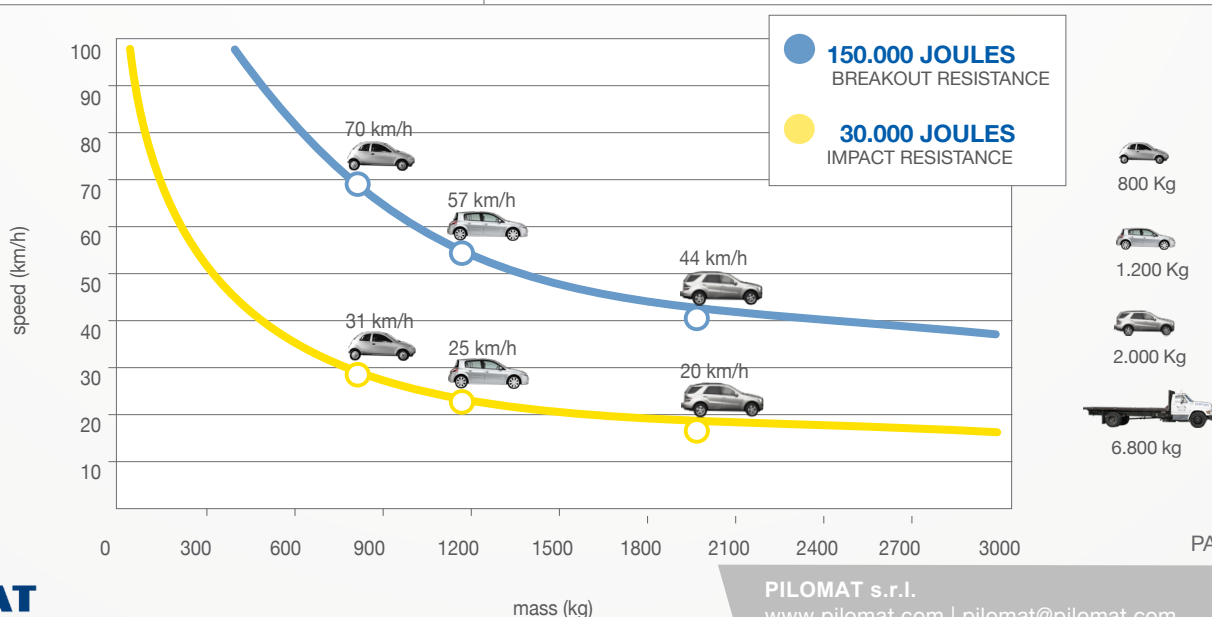

PAG.2/2

PILOMAT
HÖRMANN
100% MADE IN ITALY

PILOMAT s.r.l.
www.pilomat.com | pilomat@pilomat.com
Via Zanica 17/p, 24050, Grassobbio (BG) Italy
Tel. +39.035.29.72.20
Copyright 2023© Pilomat S.r.l. All rights reserved

REVIEW

28/03/2023