

275/K12ST 900F-1200F



ANTI-TERRORISM FIXED BOLLARD WITH SIMPLE STYLE


The fixed 275/K12FB bollards have been designed and built with architectural appearance similar to that of the retractable bollard and therefore also allows the combined use of both versions.
Current models are the result of our 50 years' experience in the security field and in excess of 20 years in the specific design and manufacture of bollards.

GENERAL FEATURES


The fixed antiterrorism bollards are used to separate and prevent vehicles from breaching the perimeter of the following areas: Research Centres Embassies, Police Headquarters, Military Bases, Ministerial Buildings Sites in Sensitive Areas. These items are designed to ensure antiterrorism defence, and must be cemented into the ground at a depth that meets the standards of breakout resistance.



Anticorrosion marine treatment



Custom stainless steel cylinder cover



Replaceable stainless steel sleeve painted or brushed

AVAILABLE ITEMS

BOLLARD 275/K12ST - NORMAL STEEL PAINTED

BOLLARD 275/K12ST - WITH REPLACEABLE SLEEVE, STAINLESS STEEL PAINTED

BOLLARD 275/K12ST - WITH REPLACEABLE SLEEVE, STAINLESS STEEL BRUSHED

PAINTING WITH RAL COLOUR ON REQUEST


HEAD WITH WELDED COVERPLATE

HEAD WITHOUT LOGO FOR 275/K12ST

REFLECTING ADHESIVE STRIP - WHITE (NO-LOGO)

MULTILED LIGHTING STRIP - 25 LED POINTS

LIGHTING STRIP POWER CIRCUIT FOR FIXED BOLLARDS (MAX. 8 BOLLARDS)

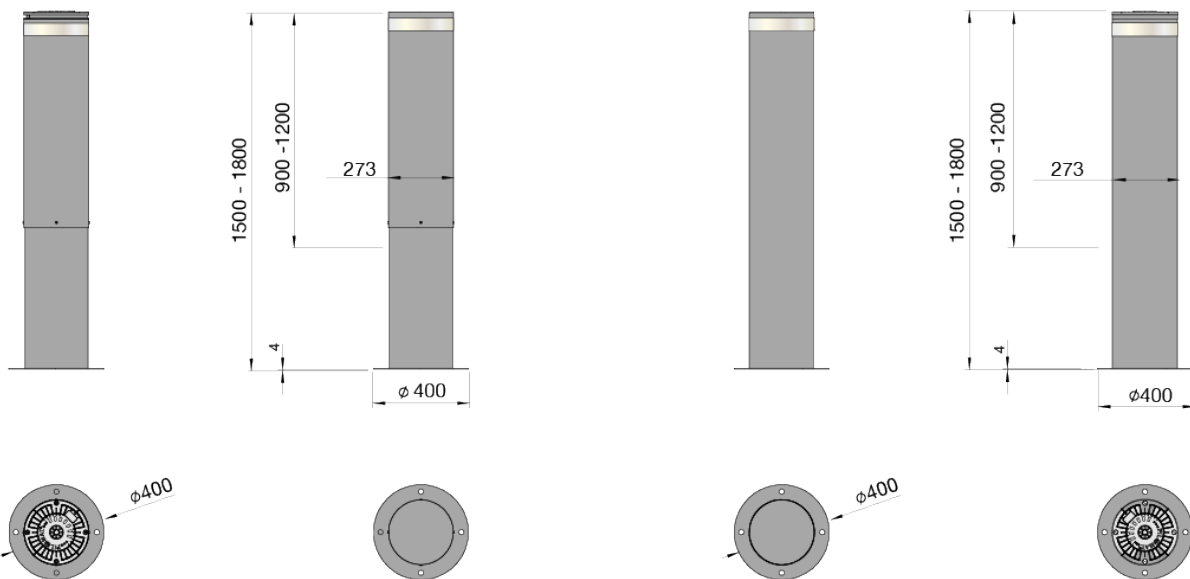

275/K12ST 900F-1200F



	275/K12ST-900F	275/M50ST-1200F
CYLINDER MATERIAL	S355JR NORMAL STEEL - STAINLESS STEEL SLEEVE (AISI 304)	
CYLINDER DIAMETER	273mm	
CYLINDER HEIGHT	900mm	1200mm
CYLINDER THICKNESS	23mm	
CYLINDER NORMAL STEEL FINISH	ANTI-CORROSION TREATMENT - GREY ANTHRACITE STANDARD PAINTING	
CYLINDER WITH STAINLESS STEEL SLEEVE FINISH	GREY ANTHRACITE STANDARD PAINTING OR BRUSHED	
OTHER CYLINDER FINISH	KNURLING ON CYLINDER'S SURFACE	
REFLECTING ADHESIVE STRIP	STANDARD - HEIGHT 55mm	
CONNECTION LINE FOR LIGHTING STRIP (OPTIONAL)	STANDARD 10m (MAX. LENGTH 80m)	
PROTECTION CLASS	IP67	
IMPACT RESISTANCE (WITHOUT DEFORMATION)	700.000 J	
BREAKOUT RESISTANCE	2.000.000 J	
ANTI-CORROSION TREATMENT "M"	OPTIONAL ORDER IN CASE OF INSTALLATION AT LESS THAN 2KM FROM THE SEA ORDER IN CASE OF INSTALLATION WHERE SALT IS USED ON THE ROAD TO AVOID ICE FOR A PERIOD UP TO 3 MONTHS	
IN COMPLIANCE WITH	PAS68:2013 V/7500(N3)/80/90:0.0/20.0 IWA 14-1:2013 V/7200(N3C)/80/90:0.3 ASTM F2656/2656M 18a C750 - P1	

