

HÖRMANN



Branches and Industries

Gates that open for PERFECTION,
and close for PROTECTION

version 01-2022

Sustainability

Reasonable and prudent use of energy, raw materials and production methods has always played a central role in our company.

Our today's decisions shape our tomorrow's world.

We process high-quality, durable materials by applying environmentally friendly and state-of-the-art technologies. Just another reason why our product lines PRO, HOME, and DIY excel through highest quality and a very long lifetime. By adhering to these principles, we take responsibility for present and future generations.

Another key ambition is to promote actions that support the compatibility of work and family. Our new company restaurant and kindergarten make a significant contribution to this goal by supporting everyday family life and improving and encouraging the work-life balance of our employees.

Our 7 principles of sustainability and social responsibility

1. Photovoltaic systems

To contribute to a greener environment, our production processes take advantage of the powerful photovoltaic system installed on the roof of the production halls which converts the radiation of the sun into usable energy.

2. Façade greening

Façade greening with vertical green walls serves as natural insulation and protects our production halls from heating up in summer and reduces heating costs in winter.

3. Busy bees

Façade greening as "natural air conditioning" is a valuable habitat and an important source of food for animals such as butterflies, birds, and especially our amazing bees. We are committed to sustainability and the preservation of biodiversity and support local farming by creating additional green spaces.

4. Electric vehicles

The electric vehicles in our fleet encourage the establishment of a quiet, efficient, and clean electric mobility. Thanks to their environmentally friendly drive systems, electric motors are an innovative and efficient alternative to conventional combustion engines.

5. Wastewater-free powder coat finish

Our electrostatic powder coating plant is the largest in Austria and one of the most environmentally friendly and efficient systems for surface treatment worldwide. We rely on a wastewater-free process water and sink treatment that does not compromise the environment.

6. Waste heat utilisation and organic district heating

Our production halls are heated both by waste heat generated during the thermal processes in production and by climate-neutral district heating supplied by the nearby biomass heating plant.

7. Company childcare facilities

Thanks to our company kindergarten parents need less time to drop off or pick up their children. Opening hours of the childcare facilities are tailored to the needs of employees and thus reconciled with parents' work schedules. We believe in the guiding principle:

Family well-being is the heart of global well-being.



Your Benefits



Single source supplier

The vertical range of production comprises the entire development, planning, and production. Also the powder coating is carried out in our factory. Each product that leaves our company is carefully checked and tested prior to delivery.

Unique and custom-made products

The profiles, developed specifically for our gates and fences, deliver customised and creative solutions for a wide range of applications. We exclusively use the highest quality materials to manufacture our products. As a result, all products are made with genuine and exceptional craftsmanship, and maximum precision.

Quality

Aluminium, corten steel, glass and stainless steel are only some of the materials that we use to produce our gates and fences. All products of the series PRO and HOME are provided with a high-quality powder coat finish. Maximum weather resistance, easy care, and scratch-resistant surfaces guarantee beauty and quality for many years.

Traditional engineering skills and innovation

Our unique aluminium, welding, screwing and clip&glue systems are highly reliable and guarantee a maximum level of quality. All solutions are manufactured state-of-the-art and robot-assisted in one of the most modern sliding gate factories in Europe, covering a surface of approximately 25,000 m².

Teamwork and social responsibility

Teamwork is the decisive factor in the production and distribution of our products. Each component passes through various departments and is carefully checked and revised at each production step by our highly qualified employees. Our teams in sales and shipping are committed to smooth and customer-oriented work-flows in order processing.

Certification and Awards

Our products meet strict quality standards and comply with the requirements of ISO 9001, EN 1090 and EN 13241-1. All sliding gates, swing gates, folding gates and barriers bear the TÜV (Technical Inspection Association) quality seal.

International support and service

We work together with numerous companies and organizations from the public and non-profit sector in more than 30 countries all over the world.


Our international sales network allows us to react quickly, efficiently and with high flexibility to the requirements and needs of our customers.

We are on hand after project completion to provide comprehensive customer support and service.

Our Products

Our products are manufactured in our factory which covers a surface of approximately 25,000 m². The vertical range of production at the Leiring production site comprises the entire research and development, planning, and production. Our R&D team is engaged in the continuous development, testing and implementation of new manufacturing processes and cutting-edge technologies which always keep us one step ahead of our competition.

Responding to the demands of the global market, our systems are sold through three different product lines.

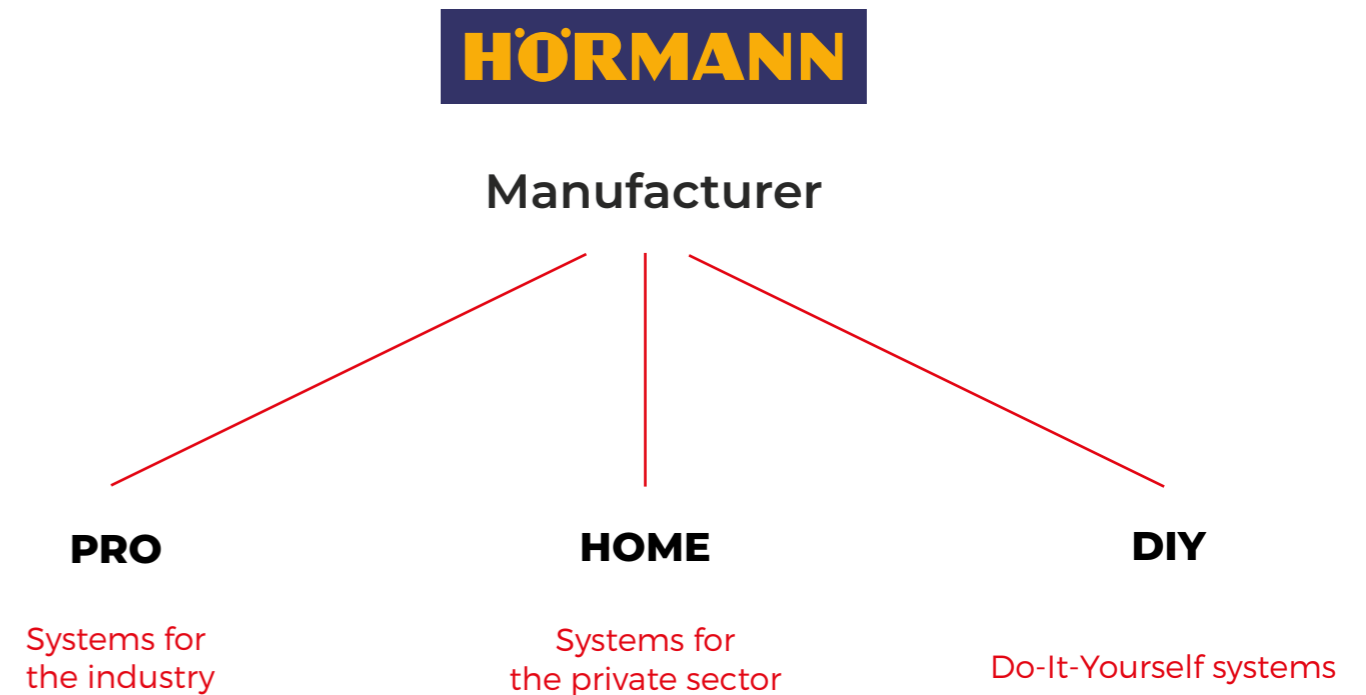

This product line is characterized by power and strength as well as stability and durability. These systems are specifically and primarily designed for use in industrial and commercial areas, combining strength and reliability with aesthetic sensibility. The gates and fences of this product line are fully customisable, and therefore unique in design and construction.

Our product line for the private sector convinces with maximum flexibility and great variety. The stylish gates and fences are tailored to the requirements of private customers, and guarantee privacy and protection in combination with a high degree of architectural aesthetics.

Our modular Do-It-Yourself systems are based on standardised components that offer innumerable design possibilities and can easily be adapted to existing situations. Pre-drilled holes and the provided fastening material facilitate assembly. No special tools are required.




Our Products

PRO



PRO Sliding Gate Classic

Width: max. 25,000 mm, cantilever
 Height: max. 2,500 mm
 Special constructions up to a height of 5,000 mm

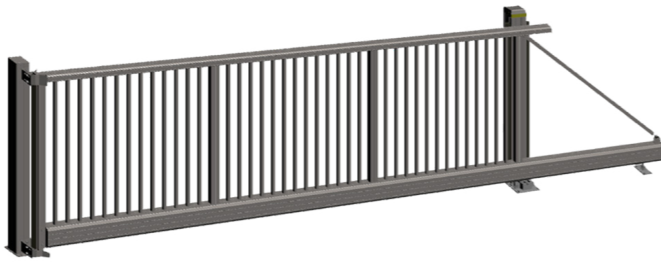

PRO Sliding Gate ECO

Width: max. 10,000 mm, cantilever
 Height: max. 2,500 mm




PRO Sliding Gate floor-guided

Width: max. 50,000 mm
 Height: max. 2,500 mm
 Special constructions up to a height of 6,000 mm



PRO Swing Gate Classic

Width: max. 12,000 mm, single leaf
 Height: max. 2,500 mm
 Special constructions up to a height of 5,000 mm

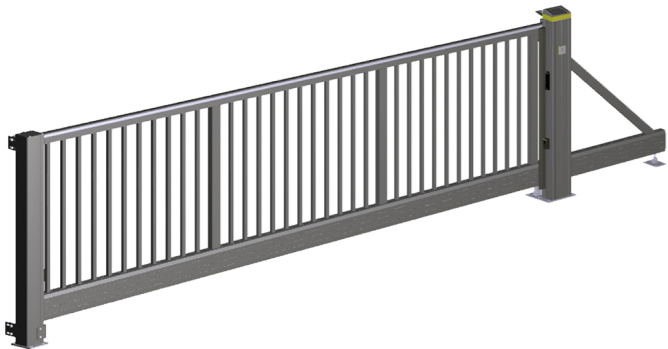

PRO Sliding Gate on sloping ground

Width: max. 25,000 mm cantilever
 Height: max. 2,500 mm
 Sliding gates on sloping ground up to 8%
 Special constructions up to a height of 5,000 mm




PRO Telescopic Sliding Gate

Width: max. 25,000 mm, cantilever
 Height: max. 2,500 mm
 Special constructions up to a height of 5,000 mm



PRO Bi-folding Speed Gate Quattro Premium

Width: max. 10,000 mm
 Height: max. 5,000 mm
 Also available as single leaf gate.

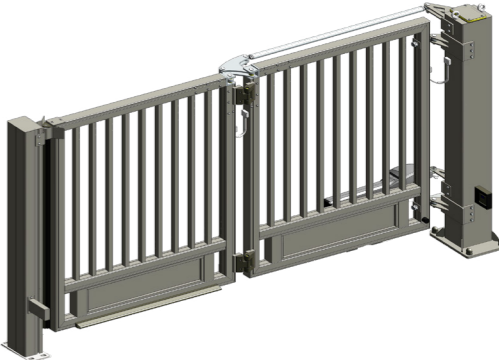

PRO Bi-folding Speed Gate Quattro ECO

Width: max. 8,000 mm
 Height: max. 3,000 mm
 Also available as single leaf gate.




PRO Extra++

Custom-made
 Foil print, milled, laser-cut, and much more ...




PRO Sliding Gate Galaxy Gate

Sliding gate with rounded corners, specially nipped perforated sheet with logo, straight bracing and integrated LED lighting

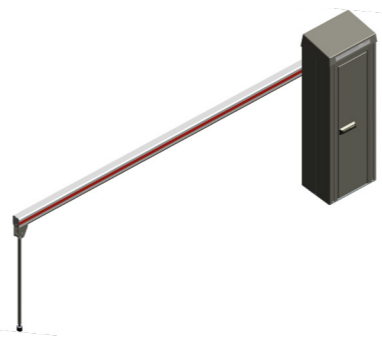

PRO Barrier 60+

Barrier length max. 6,000 mm with LED beam illumination

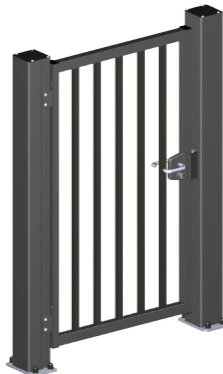

PRO Pedestrian Gate Classic

Width: max. 1,500 mm
 Height: max. 2,500 mm
 Special constructions up to a height of 5,000 mm




PRO Pedestrian Gate Industry

Width: max. 1,500 mm
 Height: max. 2,500 mm

Our Products


HOLLER ||||| HOME

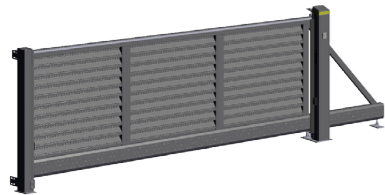

HOME Sliding Gate
Width: max. 6,000 mm, cantilever
Height: max. 2,000 mm




HOME Swing Gate
Width: max. 4,500 mm
Height: max. 2,000 mm

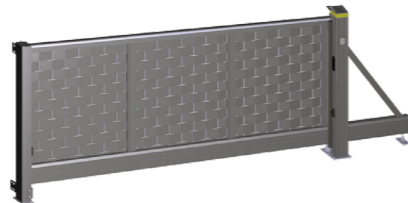

HOME Extra++
Custom-made



HOME Pedestrian Gate
Width: max. 1,500 mm
Height: max. 2,000 mm

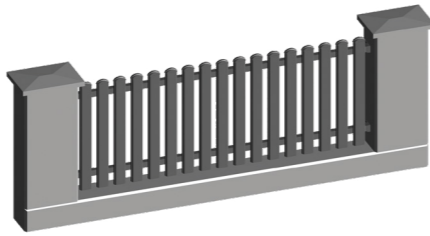


HOME Fence
In many different designs

Smart Columns




Control and intercom columns HST 5
 > Aluminium
 > 150 x 150 mm
 > Height: max. 2,500 mm
 > Designed to integrate with other gate and fence solutions made by HÖRMANN



Control and intercom columns HST 21
 > Aluminium
 > 220 x 170 mm
 > Height: max. 2,500 mm
 > Designed to integrate with other gate and fence solutions made by HÖRMANN



Control and intercom columns HST 27
 > Aluminium
 > 450 x 150 mm
 > 450 x 300 mm
 > Height: max. 3,500 mm
 > Designed to integrate with other gate and fence solutions made by HÖRMANN

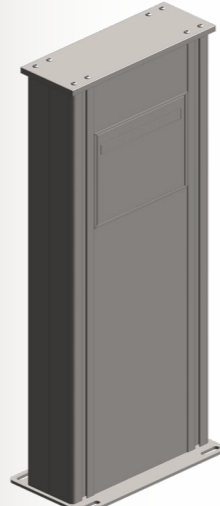

Letterbox column
 > Aluminium
 > 450 x 150 mm
 > 450 x 300 mm
 > Flush mount flap
 > Available in different heights



Parcel box column
 > Aluminium
 > 450 x 450 mm
 > 650 x 450 mm
 > One-time opening or code keypad
 > Available in different heights

Our Products

HOLLER ||||| DIY




PRO Sliding Gate VARO
Sliding gate in modular industrial design
Width: max. 8,000 mm, cantilever
Height: max. 2,500 mm



DIY Sliding Gate
Widths: 3,000, 4,000, 5,000, 6,000 mm
Height: max. 2,000 mm
Manual and automatic operation



DIY Swing Gate
Widths: 2,340, 3,340, 4,340 mm
Height: max. 2,000 mm
Manual and automatic operation

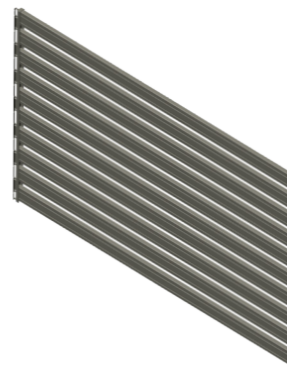

DIY Fence
Width: 2,510 mm
Height: max. 2,515 mm



DIY Pedestrian Gate
Width: 1,200 mm
Height: max. 2,000 mm
Manual operation

Solutions for different branches and industries

As a manufacturer of perimeter protection systems, we supply our customers with high-quality aluminum gate and fence systems. 30 years of experience in manufacturing, international project business, and cooperation with our sales partners, are the cornerstones of our success, and maximize our ability to provide customers with tailored solutions and comprehensive customer service.



Airports



Industry



Correctional facilities



Power plants



Logistics



Seaports



Military



Embassies



Public facilities



Government



Private properties



DIY - Do-It-Yourself

Perimeter protection at airports is achieved by a combination of mechanical and sensory components. These include conventional external protection or innovative, certified barriers at external access and parking areas, efficient vehicle gates equipped with bi-folding speed gates or combinations of barriers and sliding gates.

PRO
Barrier 60+
Max. barrier length 6 m
Here: barrier, automatic operation
Barrier length: 4.5 m incl.
LED beam illumination
Finish casing: RAL 7040 - window grey
Finish beam: white with red safety strip

PRO
Sliding Gate Classic, floor-guided
Width: max. 50 m
Height: max. 6 m
Here: sliding gate with bar infill
Width: 18 m, height: 2.5 m
Finish: RAL 9010 - pure white
Drive system: Inline 250 E

PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m
Here: sliding gate with bar infill including finger protection
Width: 25 m, height: 2 m
Finish: RAL 9010 - pure white
Drive system: Inline 250
Pedestrian gate including finger protection

PRO
Telescopic Sliding Gate
Width: max. 25 m
Height: max. 5 m
Here: telescopic sliding gate, 3-fold with bar infill
Width: 14 m, height: 2.5 m
Finish: RAL 6005 - moss green Drive system: Inline 250 T

PRO
Bi-folding Speed Gate Quattro Premium
Width: max. 10 m
Height: max. 5 m
Here: bi-folding speed gate, 2-leaf, automatic operation with tight double welded mesh infill
Width: 7 m, height: 4 m
Finish: RAL 7040 - window grey


PRO
Fence
Height: max. 2 m
Here: fence with continuous bar filling
Height: 2 m
Finish: RAL 7016 - anthracite grey

No two industrial sites are alike and each requires its own security solution. Unauthorised access to the company premises is prevented, access is regulated and boundaries are defined. We offer the most suitable gate and fence solution. Adequate perimeter protection prevents loss from inventory shrinkage and property damage, and reduces security staff costs by effectively controlling pedestrian and vehicle access - when 24-hour surveillance is not required.

PRO
Barrier 60+
Max. barrier length: 6 m
*Here: barrier, automatic operation
Barrier length: 5 m including tip support and LED beam illumination
Finish: RAL 7040 - window grey
Finish beam: white with red safety strip*

PRO
Bi-folding Speed Gate Quattro Premium
Width: max. 10 m
Height: max. 5 m
*Here: bi-folding speed gate, 2-leaf, automatic operation with bar infill
Width: 4 m, height: 5 m
Finish: RAL 7040 - window grey*

PRO
Fence
Height: max. 2 m
*Here: fence with bar infill
Spike strip for anti-climb protection
Finish: RAL 9005 - jet black*

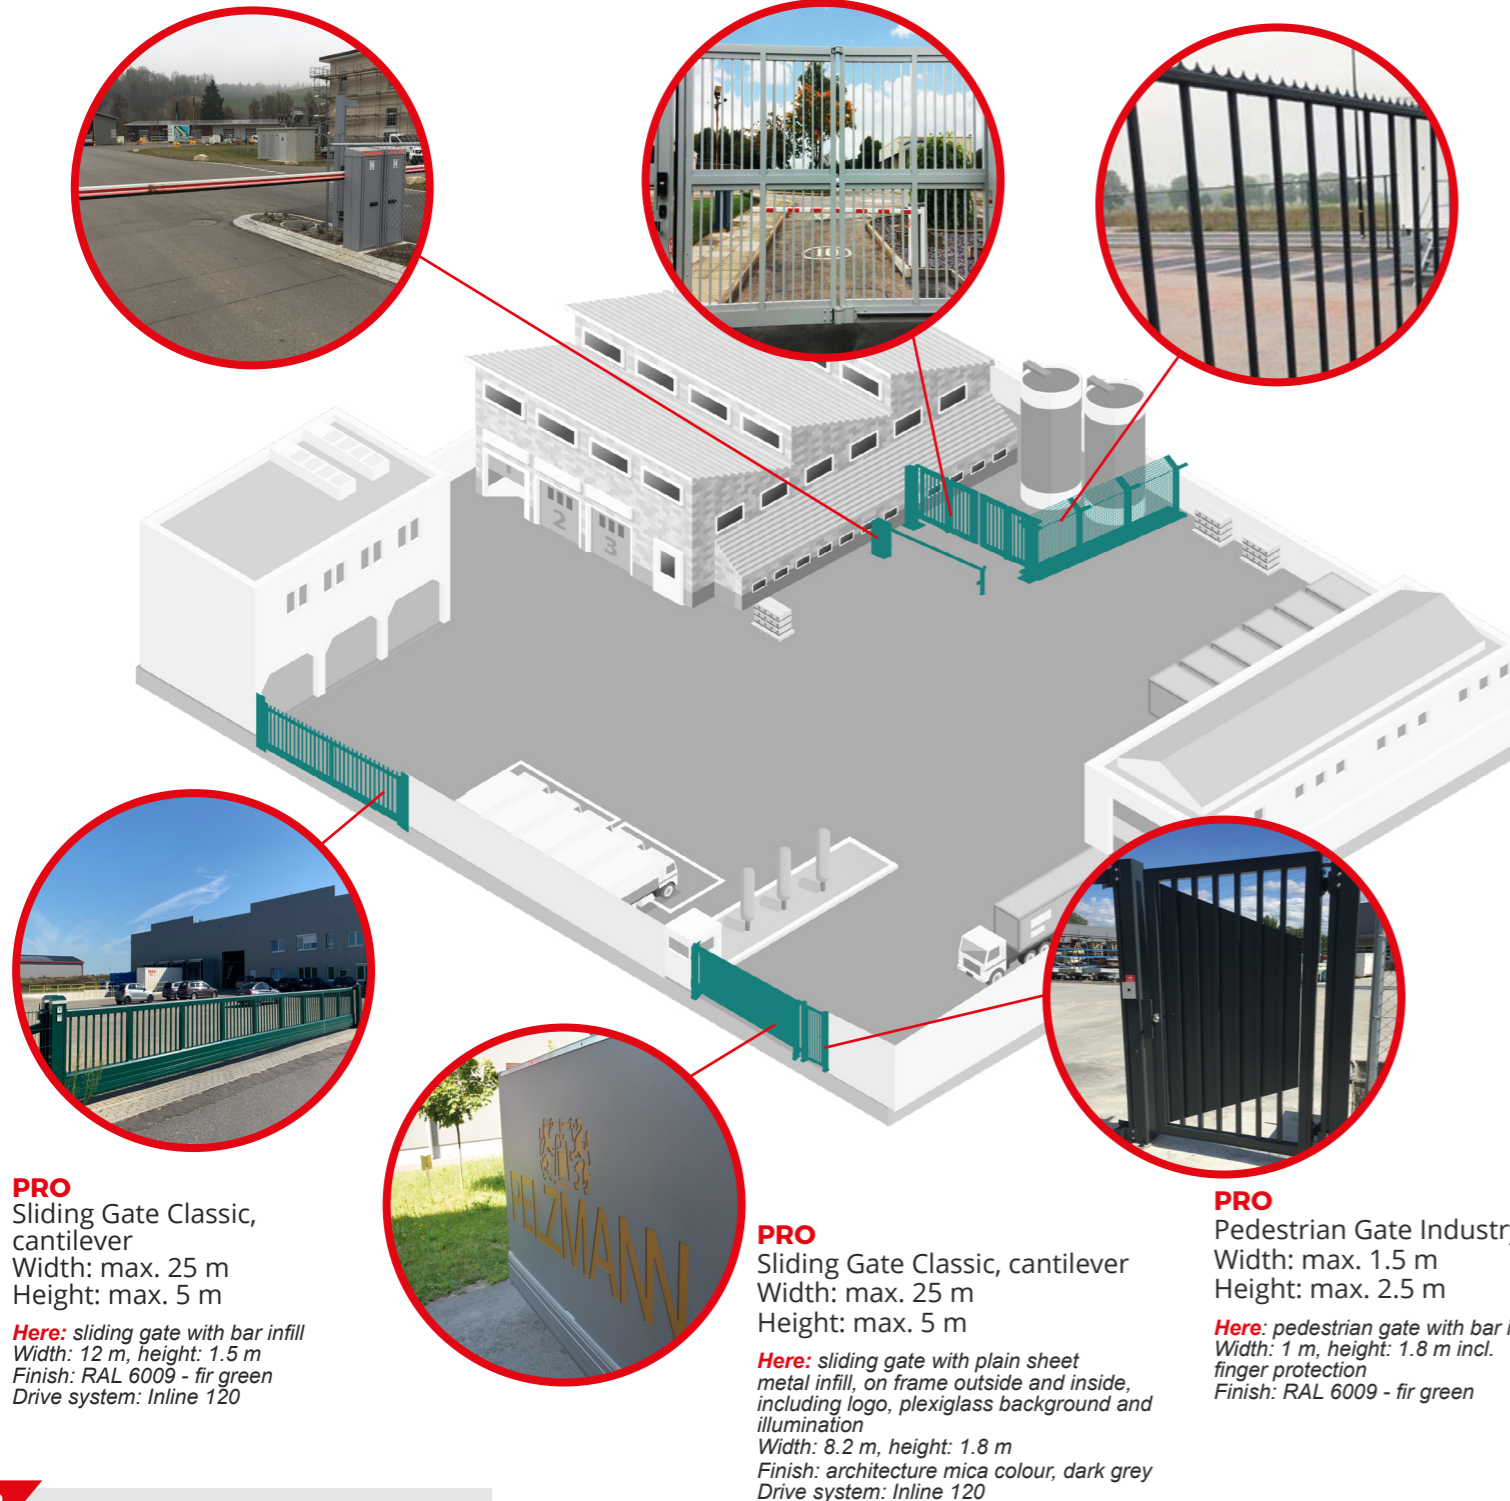

PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m
*Here: sliding gate with bar infill
Width: 12 m, height: 1.5 m
Finish: RAL 6009 - fir green
Drive system: Inline 120*


PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m
*Here: sliding gate with plain sheet metal infill, on frame outside and inside, including logo, plexiglass background and illumination
Width: 8.2 m, height: 1.8 m
Finish: architecture mica colour, dark grey
Drive system: Inline 120*

PRO
Pedestrian Gate Industry
Width: max. 1.5 m
Height: max. 2.5 m
*Here: pedestrian gate with bar infill
Width: 1 m, height: 1.8 m incl. finger protection
Finish: RAL 6009 - fir green*

Our PRO product line symbolizes power and strength, robustness, durability and reliability. Thus, our products are predestined for sensitive and safety-relevant applications.

PRO
Bi-folding Speed Gate Quattro Premium
Width: max. 10 m
Height: max. 5 m
*Here: bi-folding speed gate, 2-leaf, automatic operation with safety mat infill
Double lock and manipulation protection
Width: 8.5 m, height: 3 m
Finish: RAL 9007 - grey aluminium*

PRO
Sliding Gate Classic, floor-guided
Width: max. 50 m
Height: max. 6 m
*Here: sliding gate with safety mat infill
Width: 11 m, height: 6 m with mullion extension for barbed wire fence
anti-burglary bolts and manipulation protection
Finish: RAL 9006 - white aluminium
Drive system: Inline 250 E*

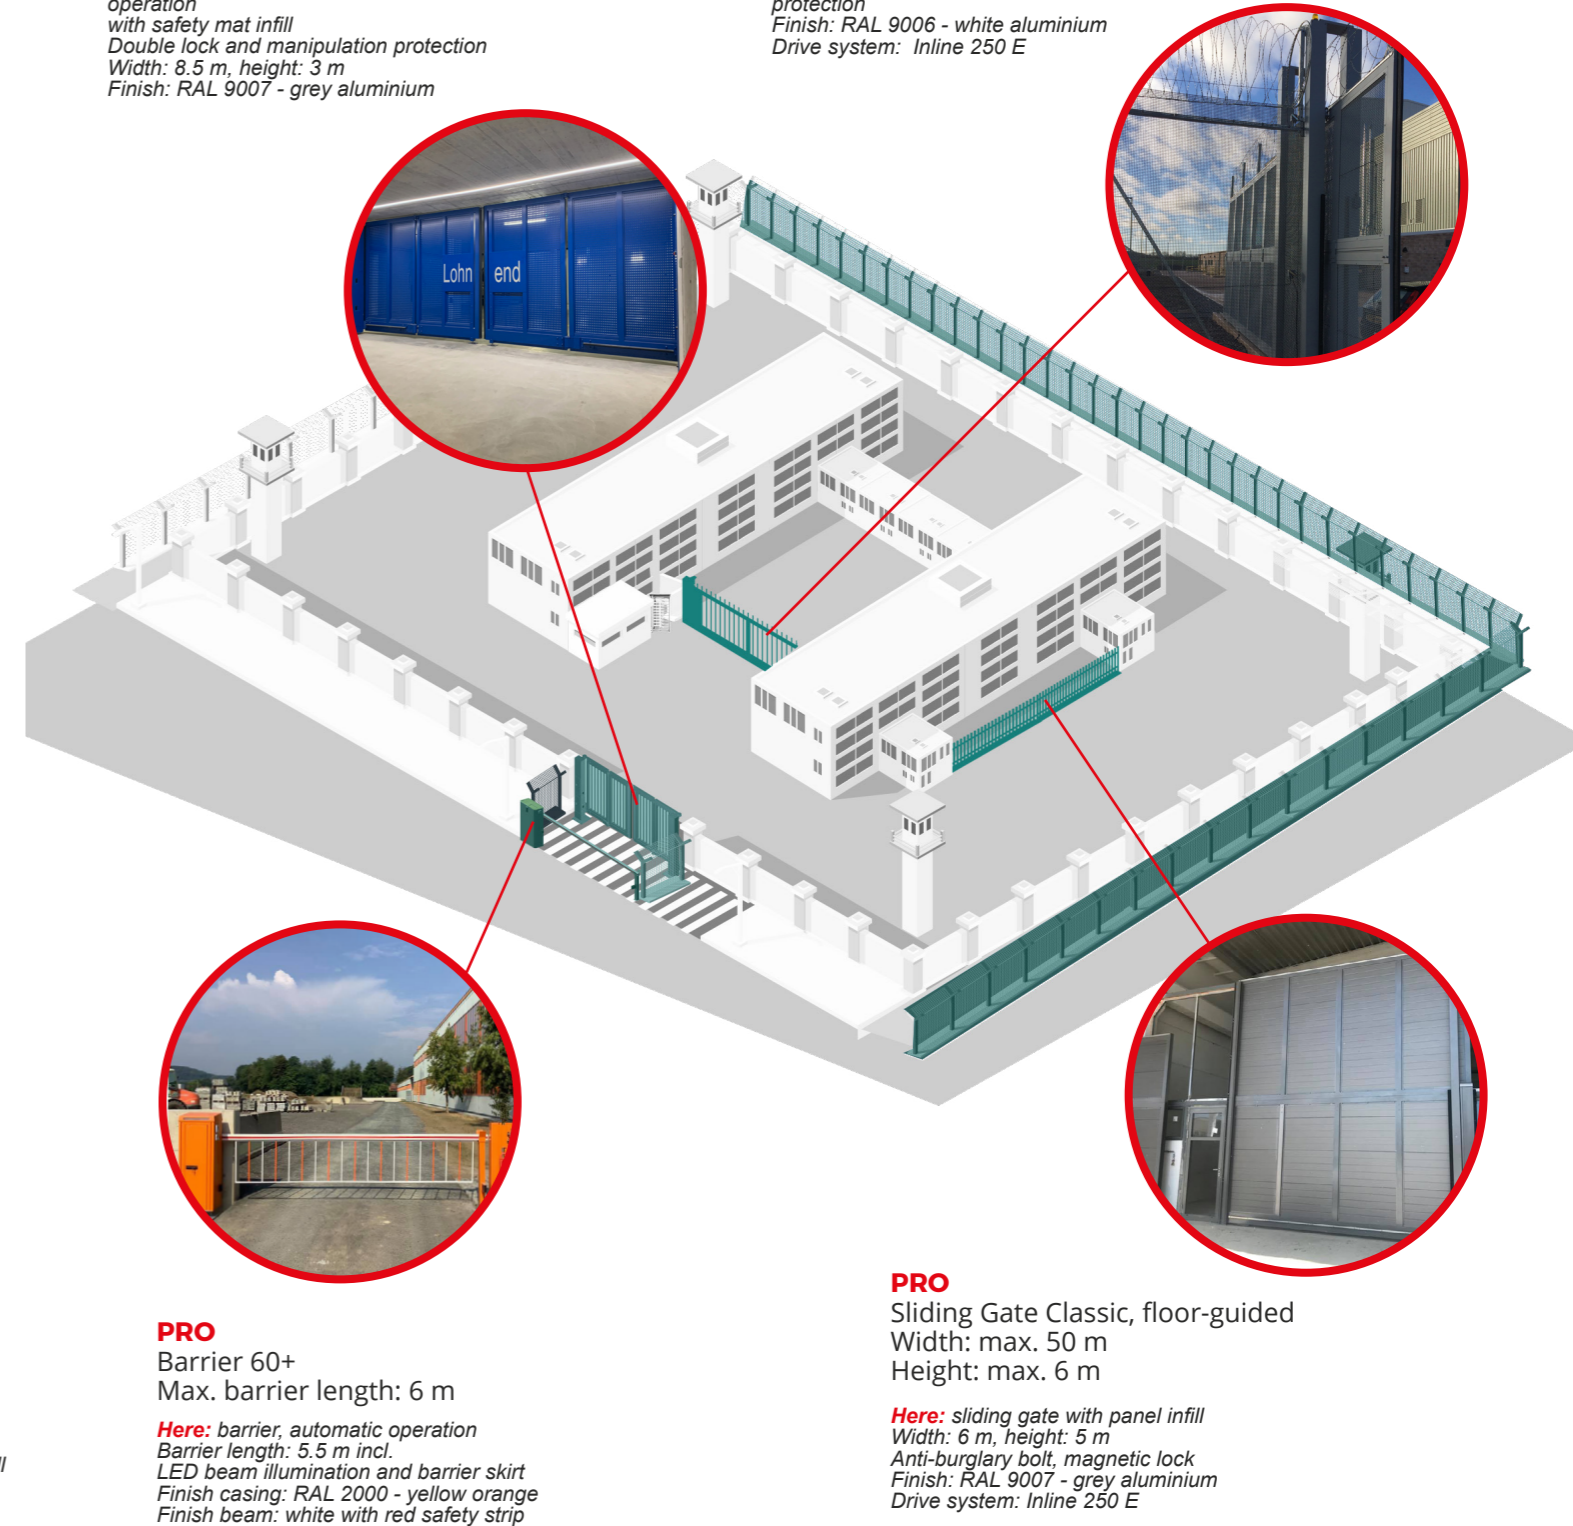


PRO
Barrier 60+
Max. barrier length: 6 m
*Here: barrier, automatic operation
Barrier length: 5.5 m incl.
LED beam illumination and barrier skirt
Finish casing: RAL 2000 - yellow orange
Finish beam: white with red safety strip*

PRO
Sliding Gate Classic, floor-guided
Width: max. 50 m
Height: max. 6 m
*Here: sliding gate with panel infill
Width: 6 m, height: 5 m
Anti-burglary bolt, magnetic lock
Finish: RAL 9007 - grey aluminium
Drive system: Inline 250 E*

Our products and solutions are developed, manufactured and tested for sensitive installations. Thanks to reliable safety options, such as emergency power supply, functionality is guaranteed even in the event of a disaster.


PRO
Swing Gate Classic
Width: max. 12 m
Height: max. 2.5 m

Here: swing gate with plain sheet metal infill, inside and outside incl. non-transparent angle
Width: 4.5 m, height: 2 m
Finish: RAL 7016 - anthracite
Drive system: Above ground motor drive 30-2

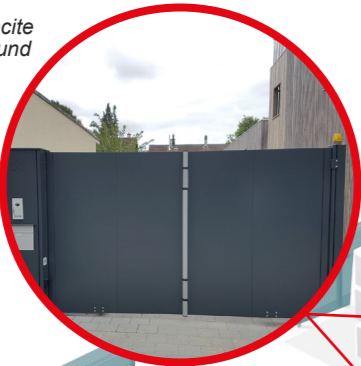

PRO
Bi-folding Speed Gate Quattro ECO
Width: max. 8 m
Height: max. 3 m

Here: bi-folding speed gate, 2-leaf, automatic operation, bar infill and laser cut in base
Width: 4 m, height: 3 m
Finish: RAL 9006 - white aluminium

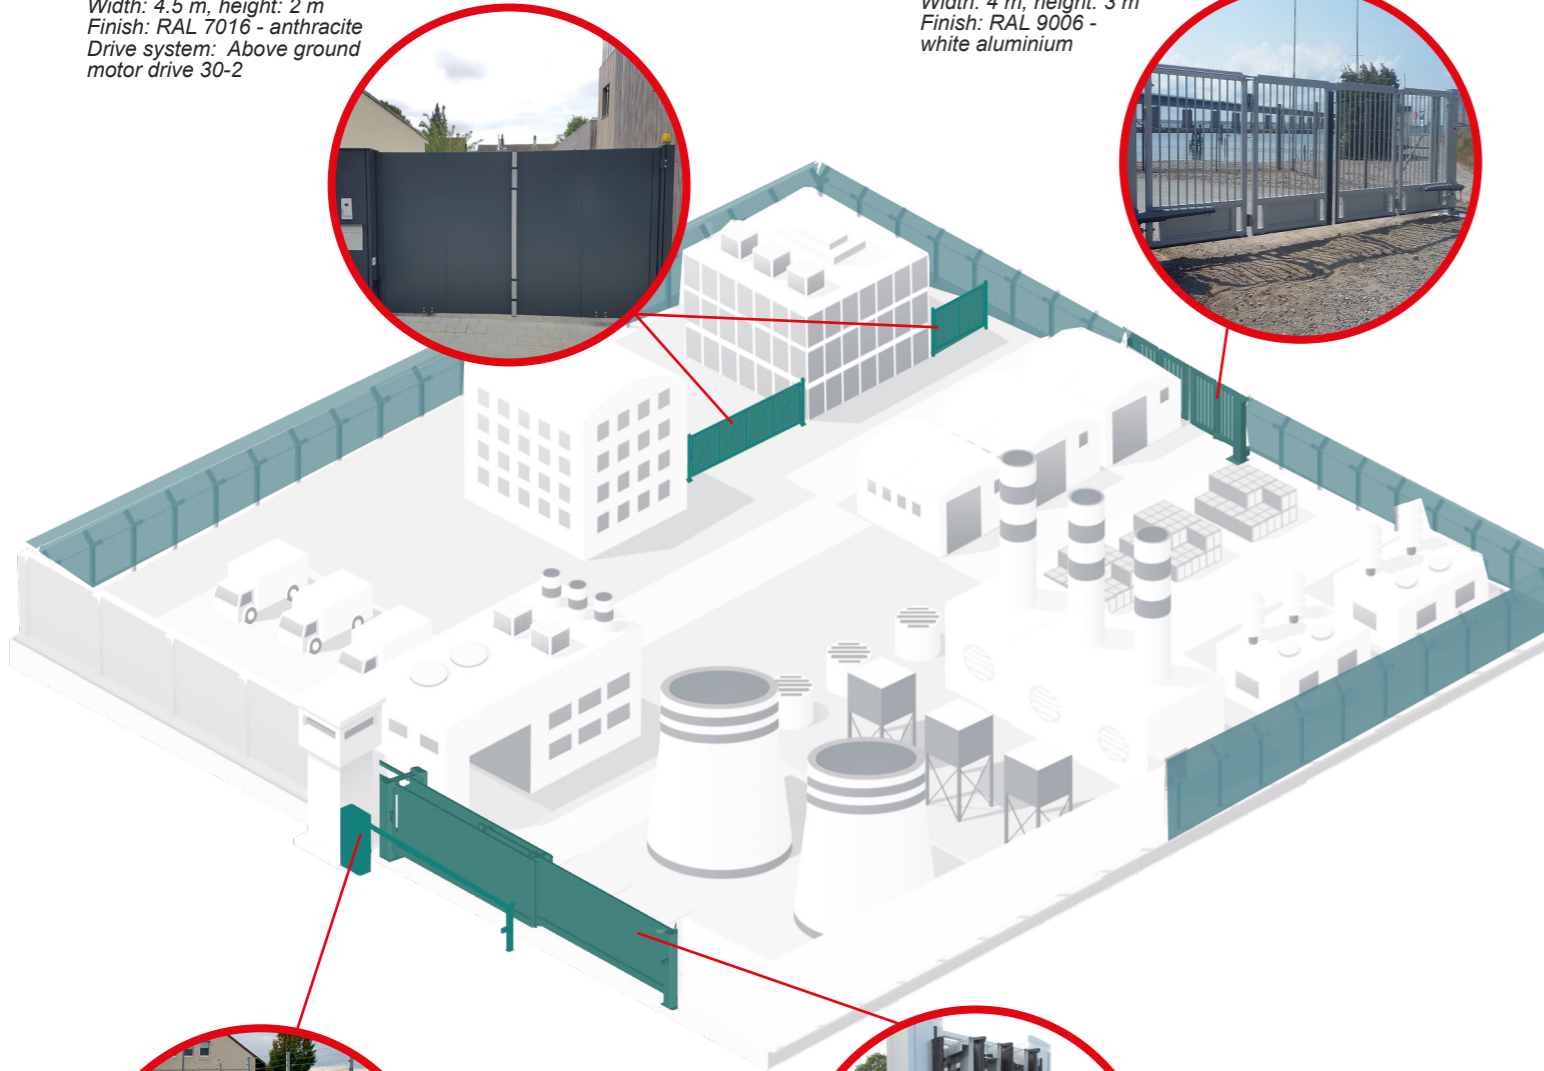

PRO
Barrier 60+
Max. barrier length: 6 m

Here: barrier, automatic operation
Barrier length: 6 m incl. LED beam illumination
RAL 9006 - white aluminium
Finish beam: white with red safety strip




PRO
Telescopic Sliding Gate
Width: max. 25 m
Height: max. 5 m

Here: telescopic sliding gate 3-fold with bar infill
Width: 14 m, height: 1.8 m
Finish: RAL 9006 - white aluminium
Drive system: Inline 250 T

PRO
Barrier 50 manual operation
Max. barrier length: 5 m

Here: barrier, manual operation
Barrier length: 4.5 m
Finish: RAL 3003 - flame red

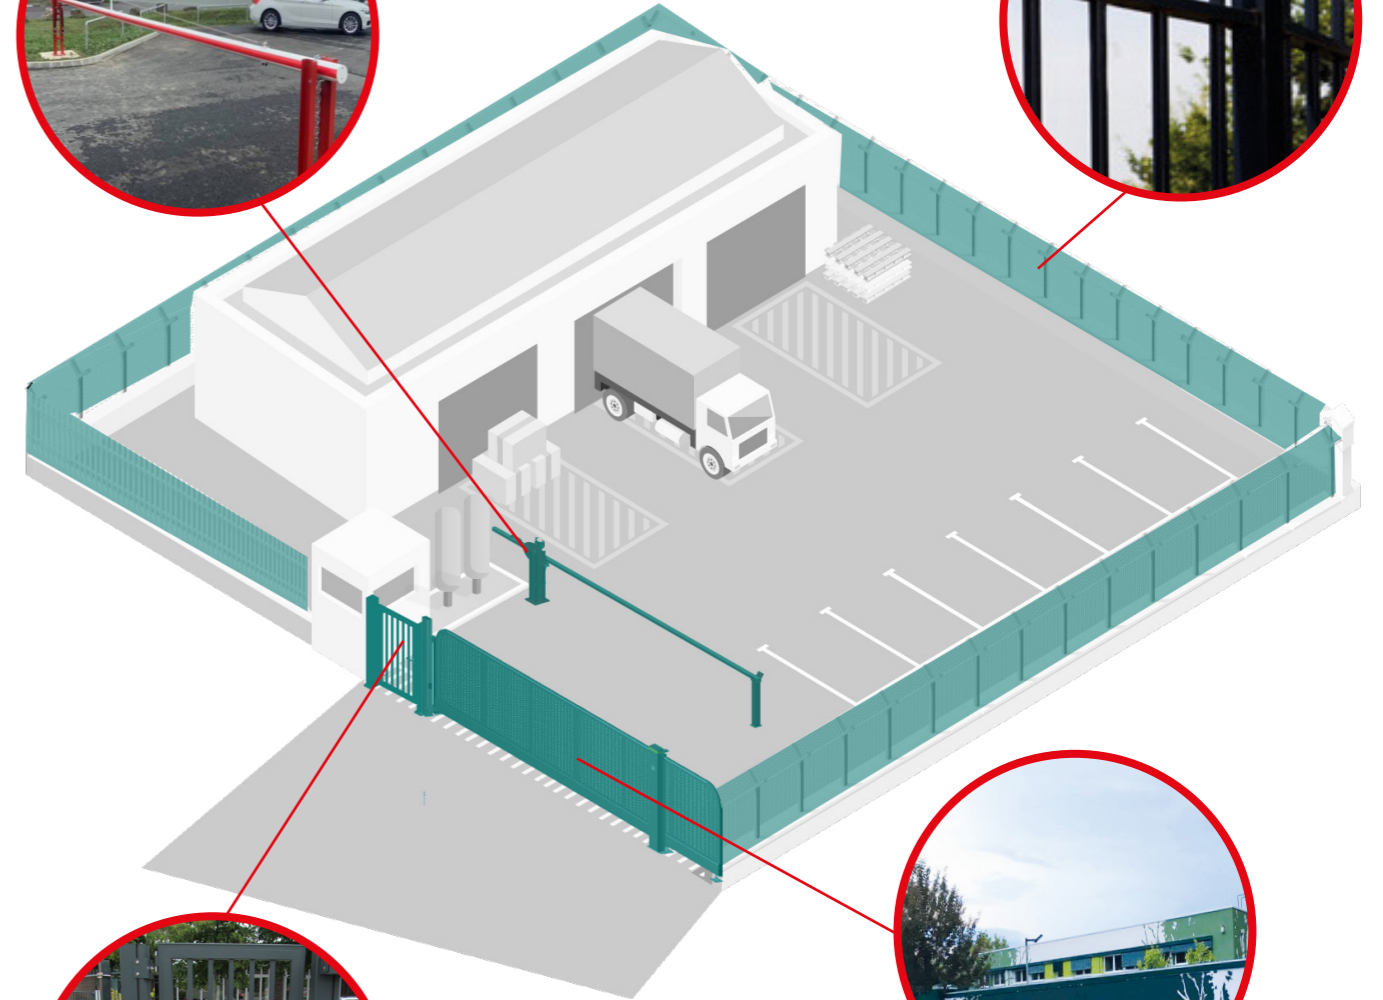

PRO
Fence
Height: max. 2 m

Here: fence with continuous bar fillings
Height: 2 m
Finish: RAL 9005 - jet black



PRO
Pedestrian Gate
Width: max. 1.5 m
Height: max. 2.5 m

Here: pedestrian gate with bar infill
Width: 0.8 m, height: 2 m
Finish: RAL 7016 - anthracite

PRO
Sliding Gate Galaxy Gate
Width: max. 25 m
Height: max. 5 m

Here: sliding gate Galaxy Gate with sheet metal infill, special affixing and LED lighting around the frame
Width: 12 m, height: 1.8 m
Finish: RAL 6026 - opal green
Drive system: Inline 120




In seaport areas there are many challenges such as customs restricted zones, risk of theft, but also unfavourable weather, strong wind and heavy vehicles. Our gates, fences and barriers guarantee a high level of security and reliability.

PRO
Bi-folding Speed Gate Quattro ECO
Width: max. 8 m
Height: max. 3 m

Here: bi-folding speed gate, 2-leaf, automatic operation, bar infill and laser cut in the base

PRO
Barrier 60+
Max. barrier length: 6 m

*Here: barrier, automatic operation
Barrier length: 5 m incl. LED beam illumination
RAL 7040 - window grey
Finish beam: white with red safety strip*

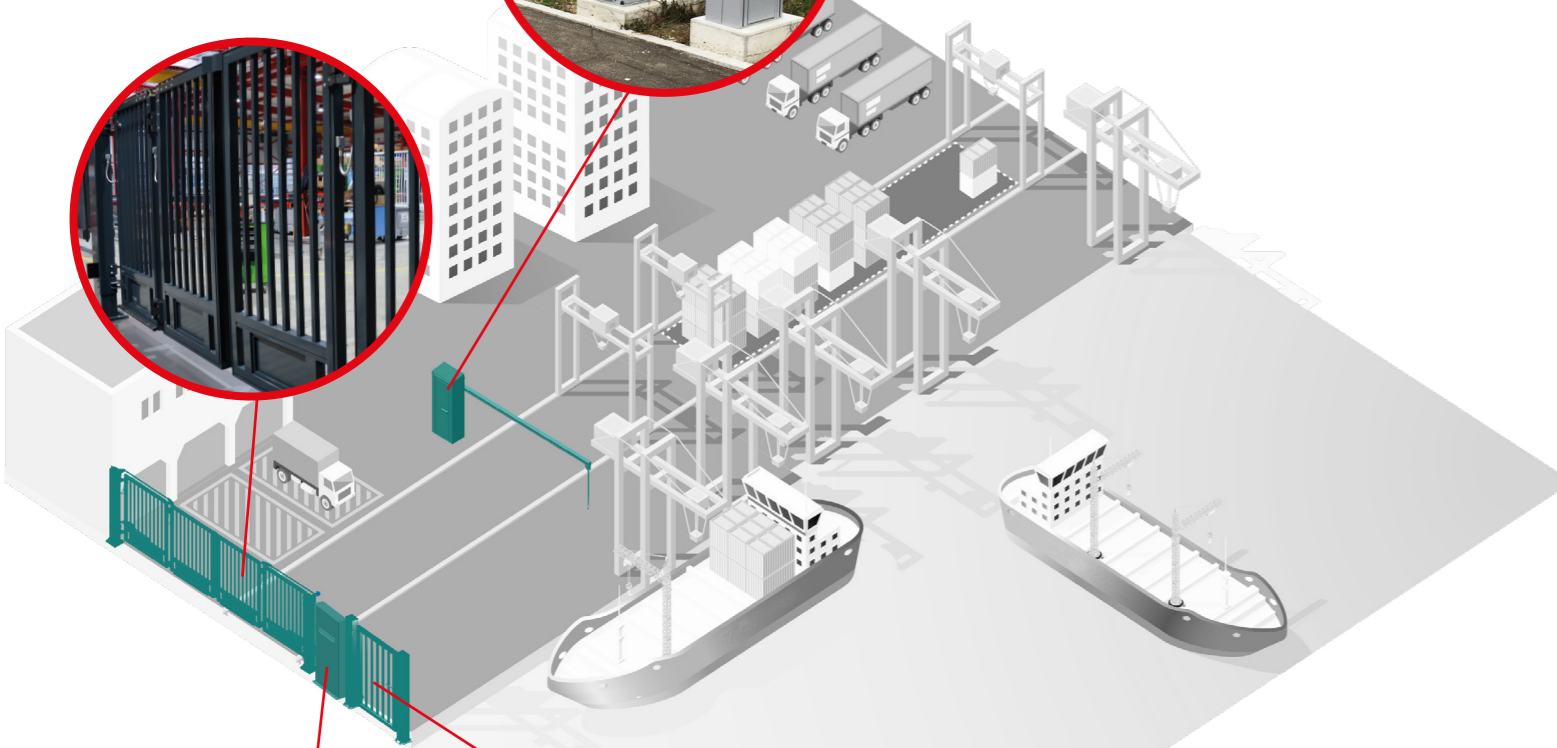

PRO
Letterbox and intercom column HST 27
Height: max. 2.5 m

*Here: letterbox column with letter drop slot, outside and collection door inside, special cut-out
Finish: RAL 7016 - anthracite*



PRO
Pedestrian Gate
Width: max. 1.5 m
Height: max. 2.5 m

*Here: pedestrian gate with bar infill
Width: 1 m, height: 2 m
Finish: RAL 7016 - anthracite*

Our customers from the military sector trust in our tested products that comply with the highest safety standards, and in our reliable service quality. Our gate and fence solutions protect sensible areas from unauthorised access.

PRO
Barrier 60+
Max. barrier length: 6 m


*Here: barrier, automatic operation
Barrier length: 5 m including
LED beam illumination
Finish casing: RAL 7016 - anthracite
Finish beam: white with red safety strip*

PRO
Sliding Gate VARO
Width: max. 9 m
Height: max. 2 m

*Here: sliding gate with bar infill
Width: 9 m, height: 2 m
Finish: RAL 9006 - white aluminium
Drive system: Inline 100*

PRO
Bi-folding Speed Gate Quattro ECO
Width: max. 8 m
Height: max. 3 m

Here: bi-folding speed gate, 2-leaf, automatic operation, bar infill and laser cut in the base

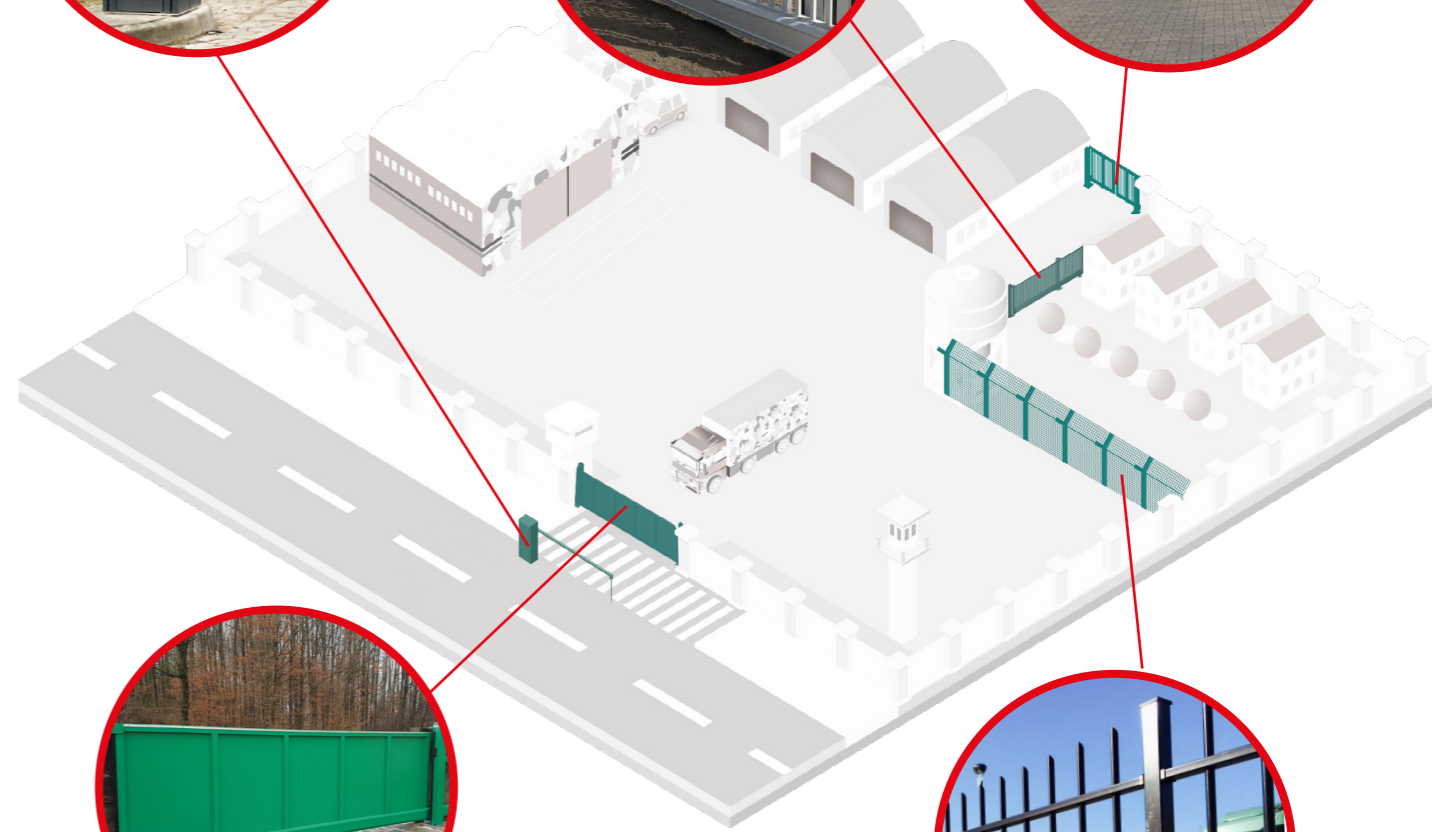

PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m

*Here: sliding gate with sheet metal infill
Width: 8.23 m, height: 1.7 m
Finish: RAL 6016 - turquoise green
Drive system: Inline 120*




PRO
Fence
Height: max. 2.5 m

*Here: fence with continuous round bar infill
Height: 2 m
Finish: RAL 9005 - jet black*

Reliable protection of access roads with sensitive infrastructure, such as embassies, is a top priority for us. Our solutions include time-controlled night closure, access for employees based on RFID technology and controlled entrance and exit for suppliers and visitors. Outstanding and prestigious design for high demands.

PRO
Barrier 60+
Max. barrier length: 6 m
Here: barrier, automatic operation
Barrier length: 4.5 m including
LED beam illumination
RAL 7040 - window grey
Finish beam: white with red safety strip

PRO
Swing gate Classic, 2-leaf
Width: max. 10 m
Height: max. 2.5 m
Here: swing gate with closed
cassette infill, safety lock
Width: 4 m, height: 2 m
Finish: architecture mica colour, dark grey

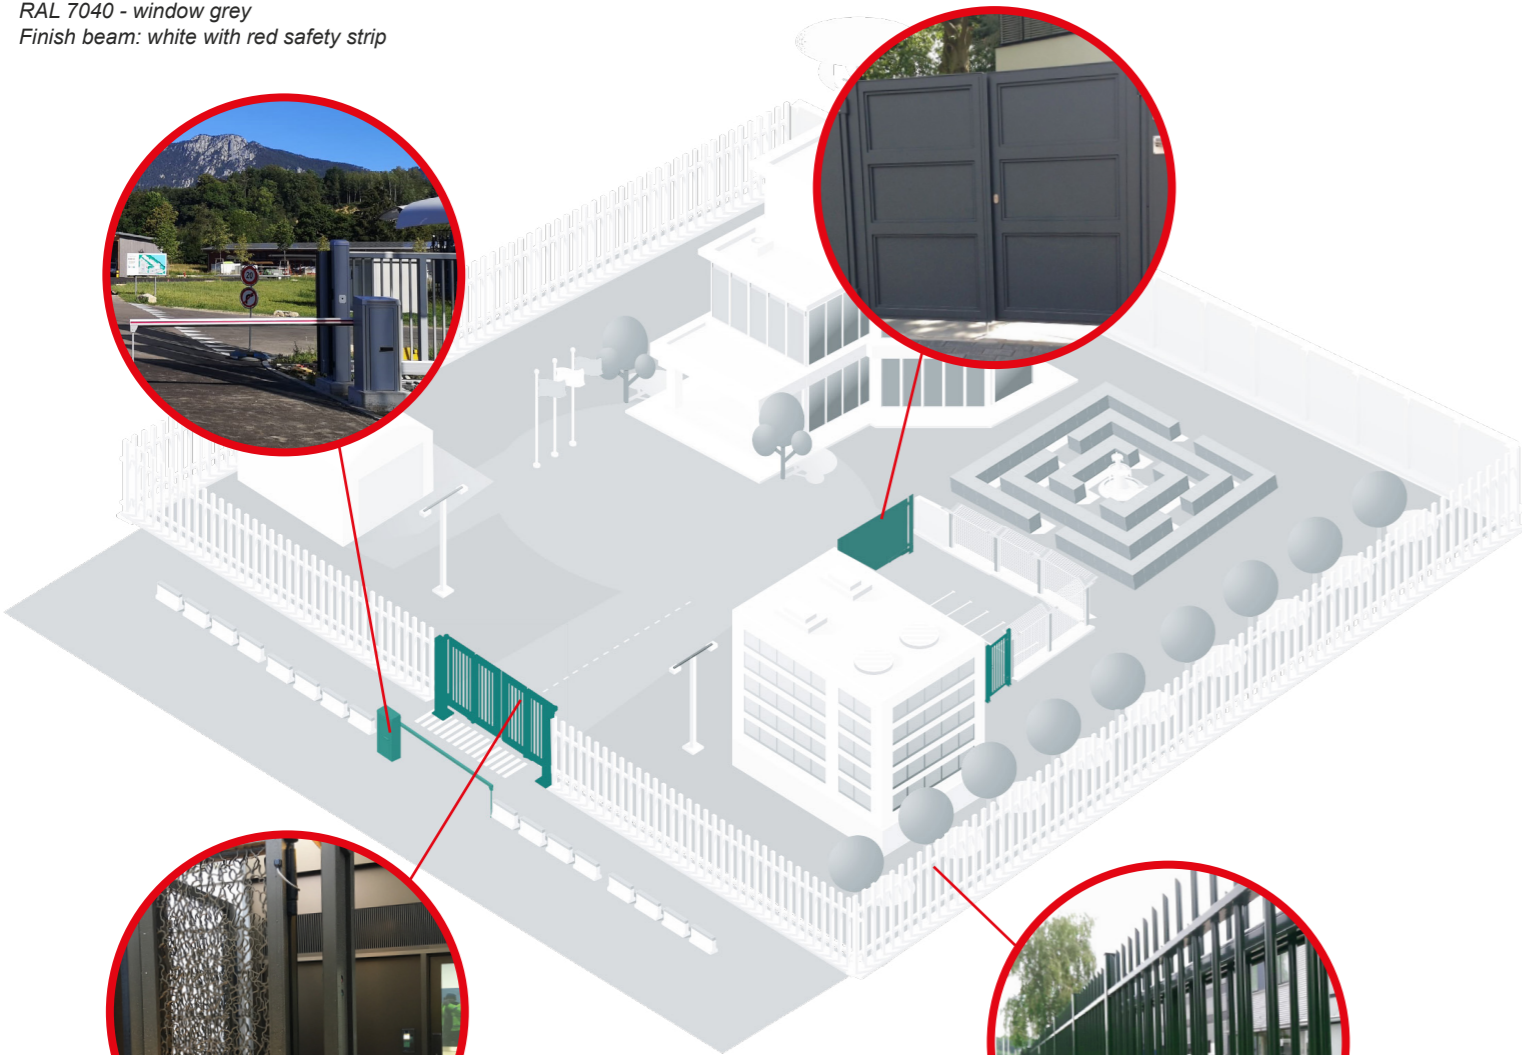


PRO
Bi-folding Speed Gate Quattro Premium
Width: max. 10 m
Height: max. 5 m
Here: bi-folding speed gate, 2-leaf, automatic operation
with prestigious special laser cut, double safety lock
Width: 6 m, height: 5 m
Finish: special colour

PRO
Fence
Height: max. 2 m
Here: fence with continuous bar filling
Height: 2 m
Finish: RAL 6009 - fir green

Public facilities require a balance between security, transparency, and openness. Our gates and fences are ideally suited to protect schools, kindergartens and other public facilities against traffic hazards or unauthorised access, while at the same time ensuring a high level of transparency.

PRO
Sliding Gate ECO
Width: max. 10 m
Height: max. 2.5 m
Here: sliding gate with continuous round bar infill
Width: 9 m, height: 2 m
Finish: RAL 6009 - fir green
Drive system: Inline 100

PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m
Here: sliding gate with sheet metal infill, covering frame
Width: 9 m, height: 1.9 m
Finish: special colour green
Drive system: Inline 100

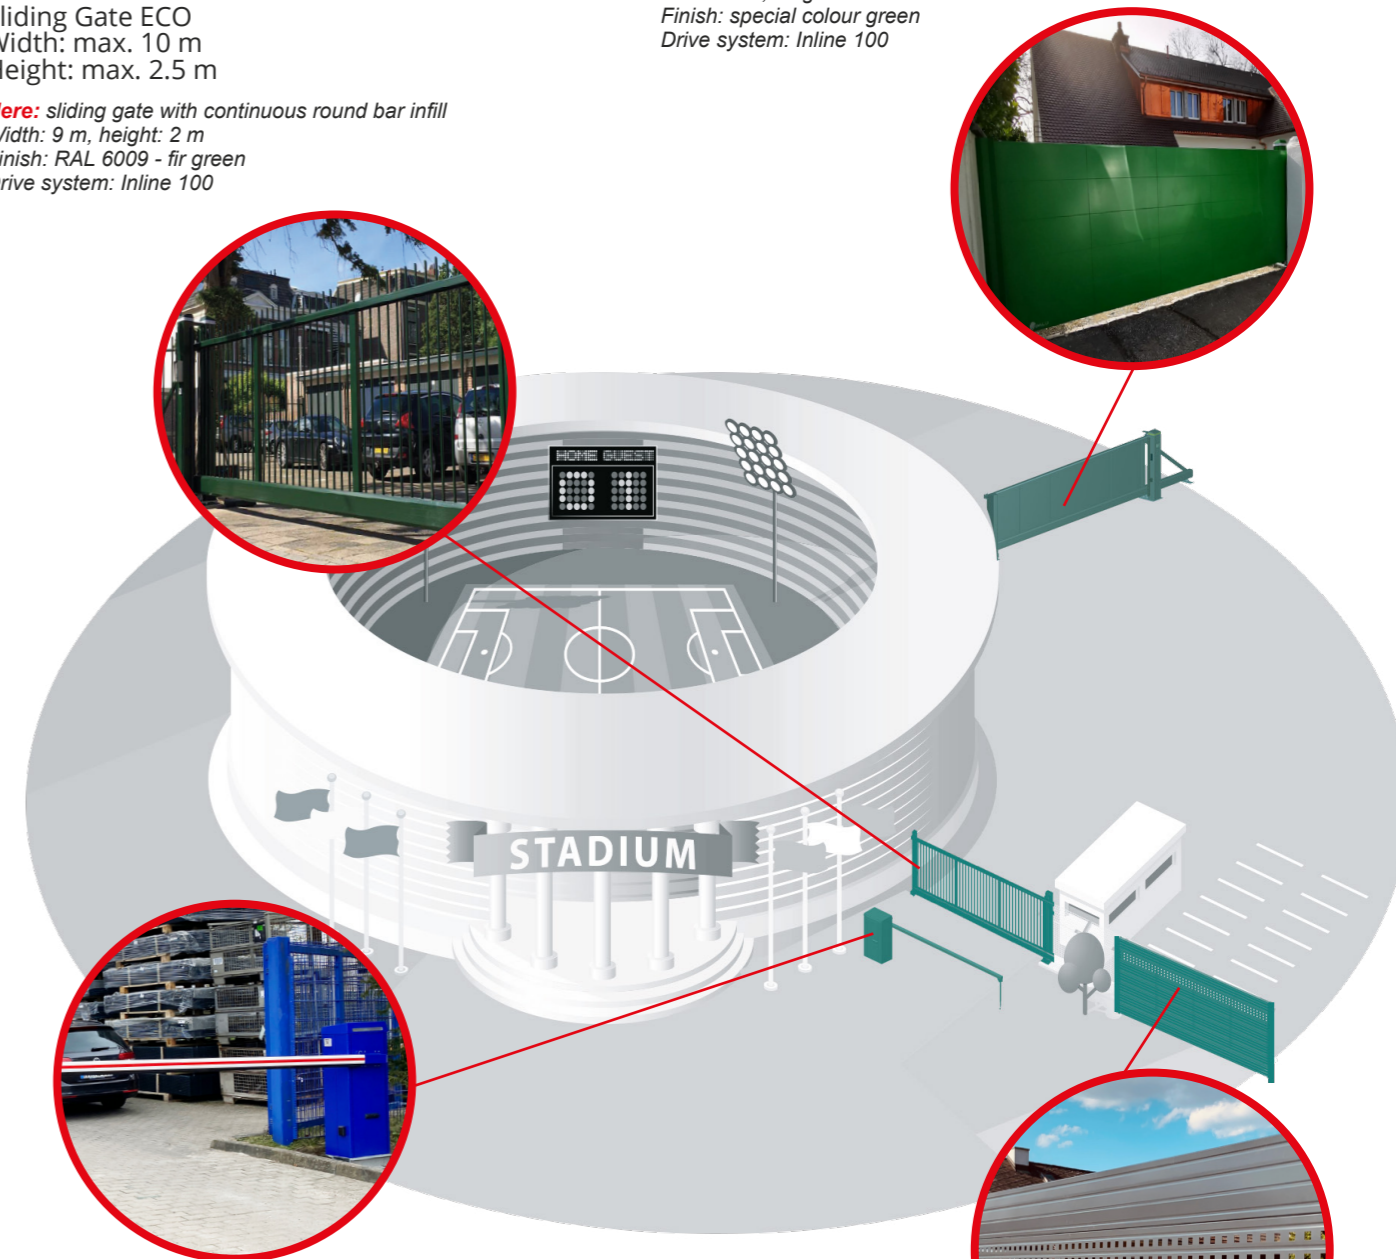

PRO
Barrier 60+
Max. barrier length: 6 m
Here: barrier, automatic operation
Barrier length: 6 m incl. LED beam illumination
Finish casing: RAL 5005 - signal blue
Finish beam: white with red safety strip

DIY
Fence panel, supplied as kit
Width: 2,510 mm (shortenable in width)
Heights: 1,015, 1,215, 1,415, 1,615, 1,815 or 2,015 mm
Here: fence panel with beaded sheet metal and perforated sheet strip
Width: 2,510 mm, height: 2,015 mm
Finish: RAL 9006 - white aluminium


Data theft or destruction can cause immense image damage and high material loss. This applies to both public and private areas. Our solutions efficiently protect sensible objects against vandalism and attacks.

PRO
Bi-folding Speed Gate Quattro Premium
Width: max. 10 m
Height: max. 5 m

Here: Bi-folding speed gate, 2-leaf, automatic operation with lamella infill
Width: 8 m, height: 3.5 m
Finish: RAL 9007 - grey aluminium

PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m

Here: sliding gate with bar infill
Width: 7 m, height: 3 m
Finish: RAL 9006 - white aluminium
Drive system: Inline 120

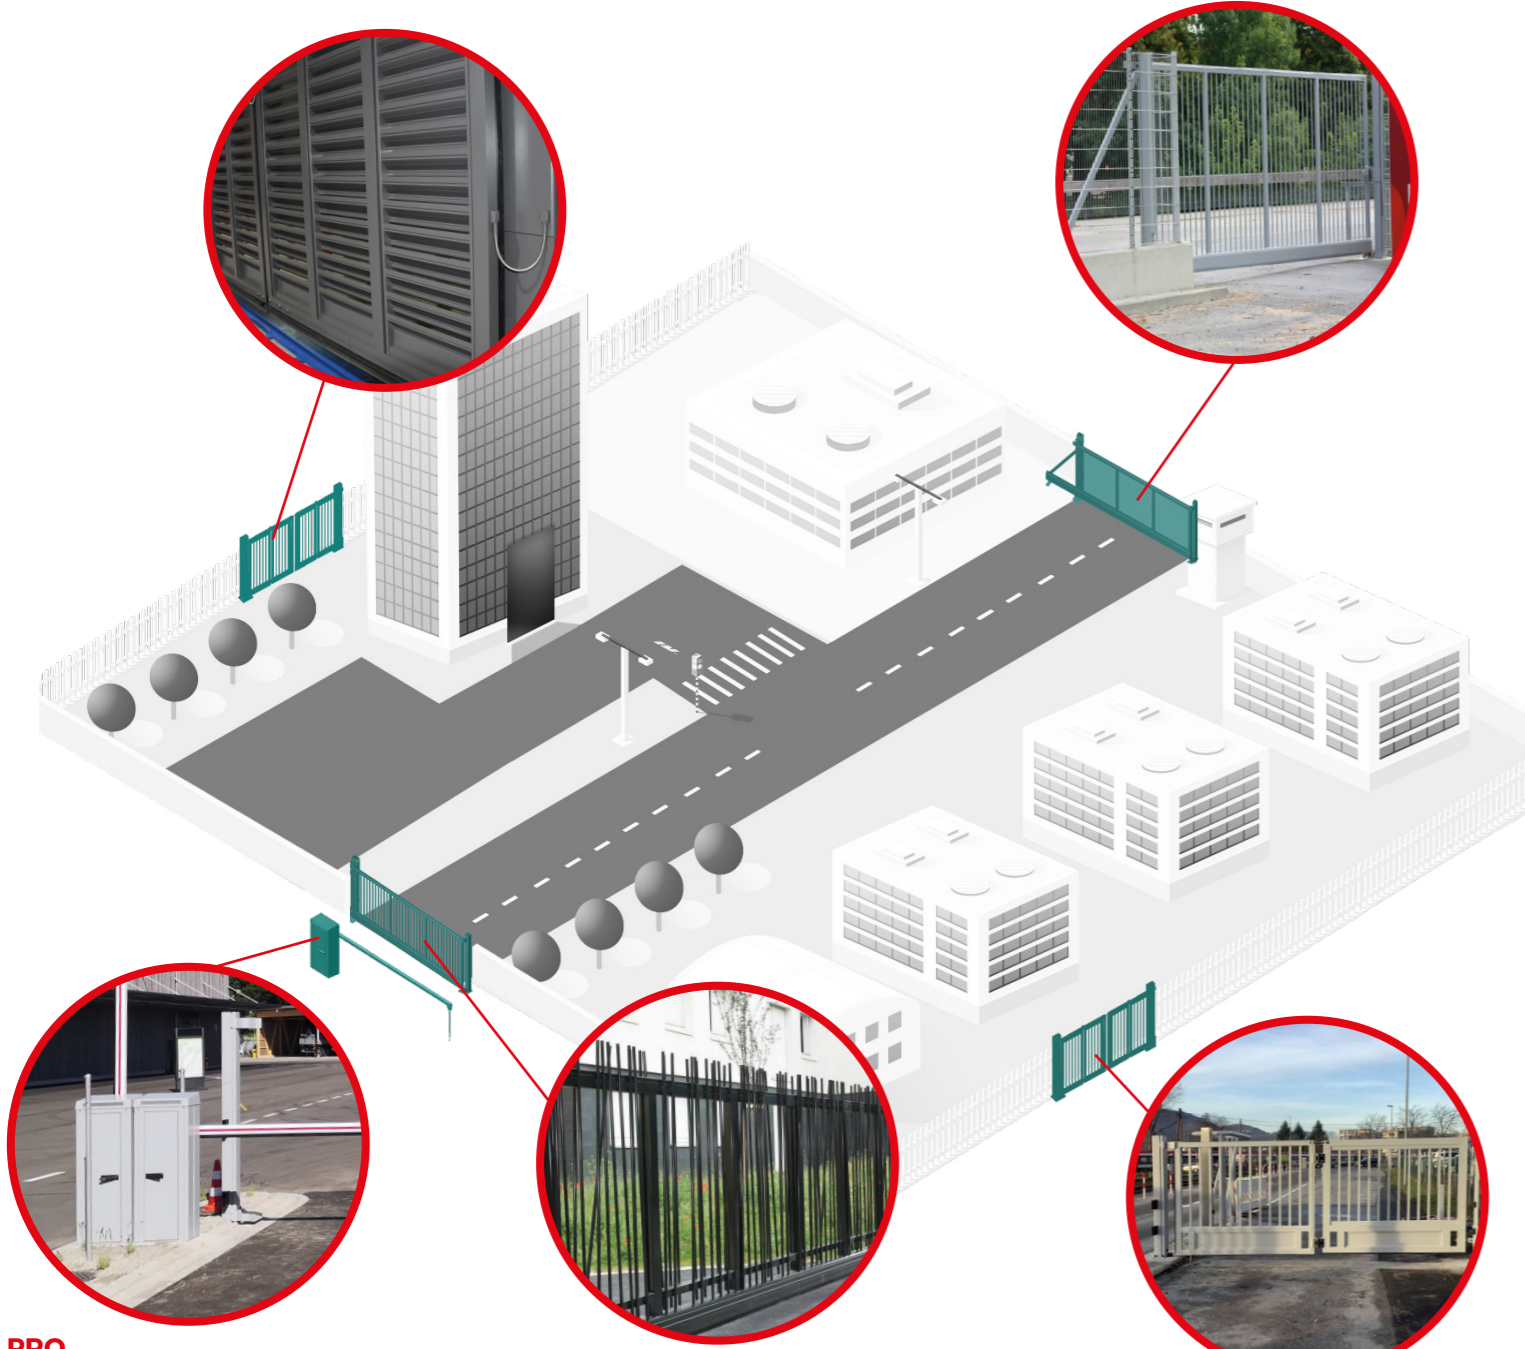

PRO
Barrier 60+
Max. barrier length: 6 m
Here: barrier, automatic operation
Barrier length: 4.5 m including LED beam illumination
Finish casing: RAL 9010 - pure white
Finish beam: white with red safety strip



PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m
Here: sliding gate with mykadoo infill
Width: 8 m, height: 2.1 m
Finish: RAL 9005 jet black
Drive system: Inline 100



PRO
Bi-folding Speed Gate Quattro ECO
Width: max. 8 m
Height: max. 3 m
Here: bi-folding speed gate, 1-leaf, automatic operation with bar infill
Width: 6 m, height: 2.5 m
Finish: RAL 7030 - stone grey




PRO
Sliding Gate Classic, cantilever
Width: max. 25 m
Height: max. 5 m

Here: sliding gate with bar infill
Width: 7 m, height: 3 m
Finish: RAL 9006 - white aluminium
Drive system: Inline 120

Our product line HOME convinces with maximum flexibility and great variety. The stylish gates and fences are tailored to the requirements of private homes. They guarantee privacy and protection in combination with a high degree of architectural aesthetics.

HOME
Swing Gate
Width: max. 6 m Height: max. 2 m
Here: swing gate AMSTERDAM, infill slat 80
Width: 3.5 m, height: 1.6 m
Finish: RAL 9006 - white aluminium
Drive system: Above ground motor drive 30-2

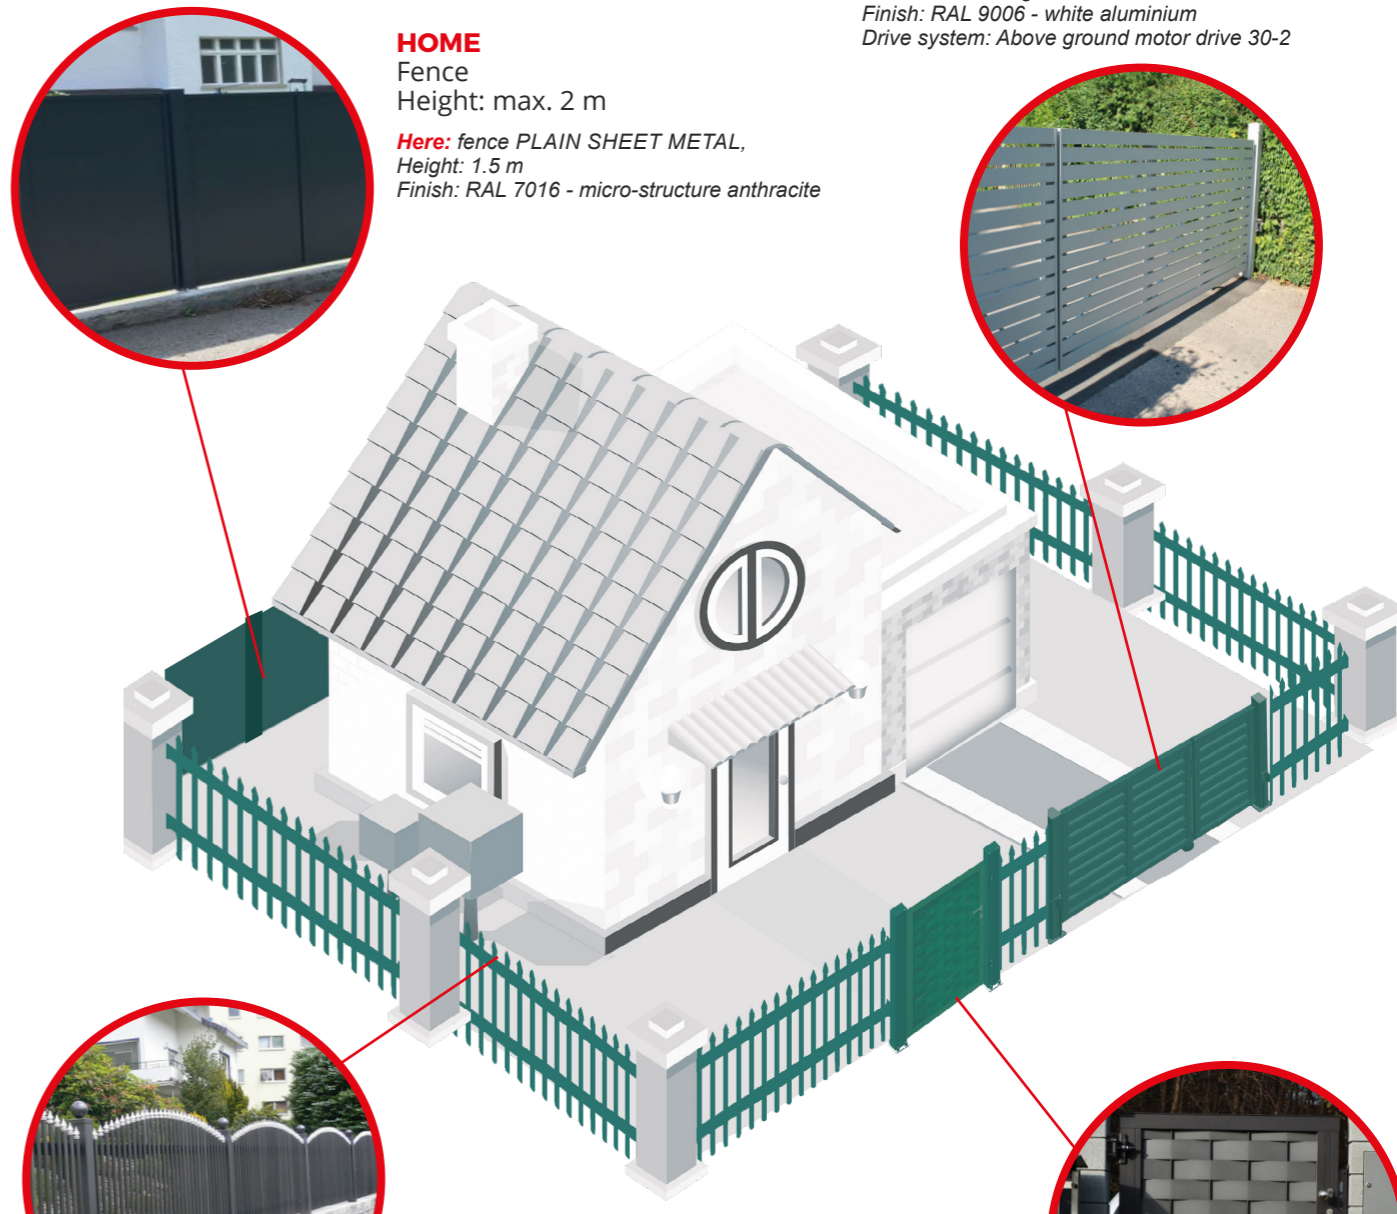


HOME
Fence
Height: max. 2 m
Here: fence PLAIN SHEET METAL,
Height: 1.5 m
Finish: RAL 7016 - micro-structure anthracite



HOME
Swing Gate
Width: max. 6 m Height: max. 2 m
Here: swing gate AMSTERDAM, infill slat 80
Width: 3.5 m, height: 1.6 m
Finish: RAL 9006 - white aluminium
Drive system: Above ground motor drive 30-2



HOME
Fence
Height: max. 2 m
Here: fence PARIS, infill palisade with onion dome finial
Height: 1.2 m
Finish: architecture mica colour, dark grey and light grey

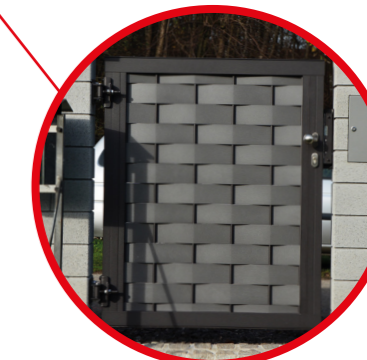

HOME
Pedestrian gate
Width: max. 1.5 m
Height: max. 2 m
Here: pedestrian gate, infill CUMERA 100
Finish: two-coloured

Our modular Do-It-Yourself systems are based on standardised components that offer innumerable design possibilities and can easily be adapted to existing situations. Pre-drilled holes and the provided fastening material facilitate assembly. No special tools are required.

DIY


Sliding gate, cantilever, supplied as kit
Widths: 3,000, 4,000, 5,000 and 6,000 mm
Heights: 1,000, 1,200, 1,400, 1,600, 1,800 or 2,000 mm. Manual or automatic operation

Here: sliding gate with beaded sheet metal and perforated sheet strip
Width: 5 m, height: 1.60 m
Finish: RAL 7016 - anthracite
Drive system: DIY Inline for sliding gates

DIY

Fence panel, supplied as kit
Width: 2,510 mm (shortenable in width)
Heights: 1,015, 1,215, 1,415, 1,615, 1,815 or 2,015 mm

Here: fence panel with beaded sheet metal and perforated sheet strip
Width: 2,510 mm, height: 1,615 mm
Finish: RAL 6005 - moss green

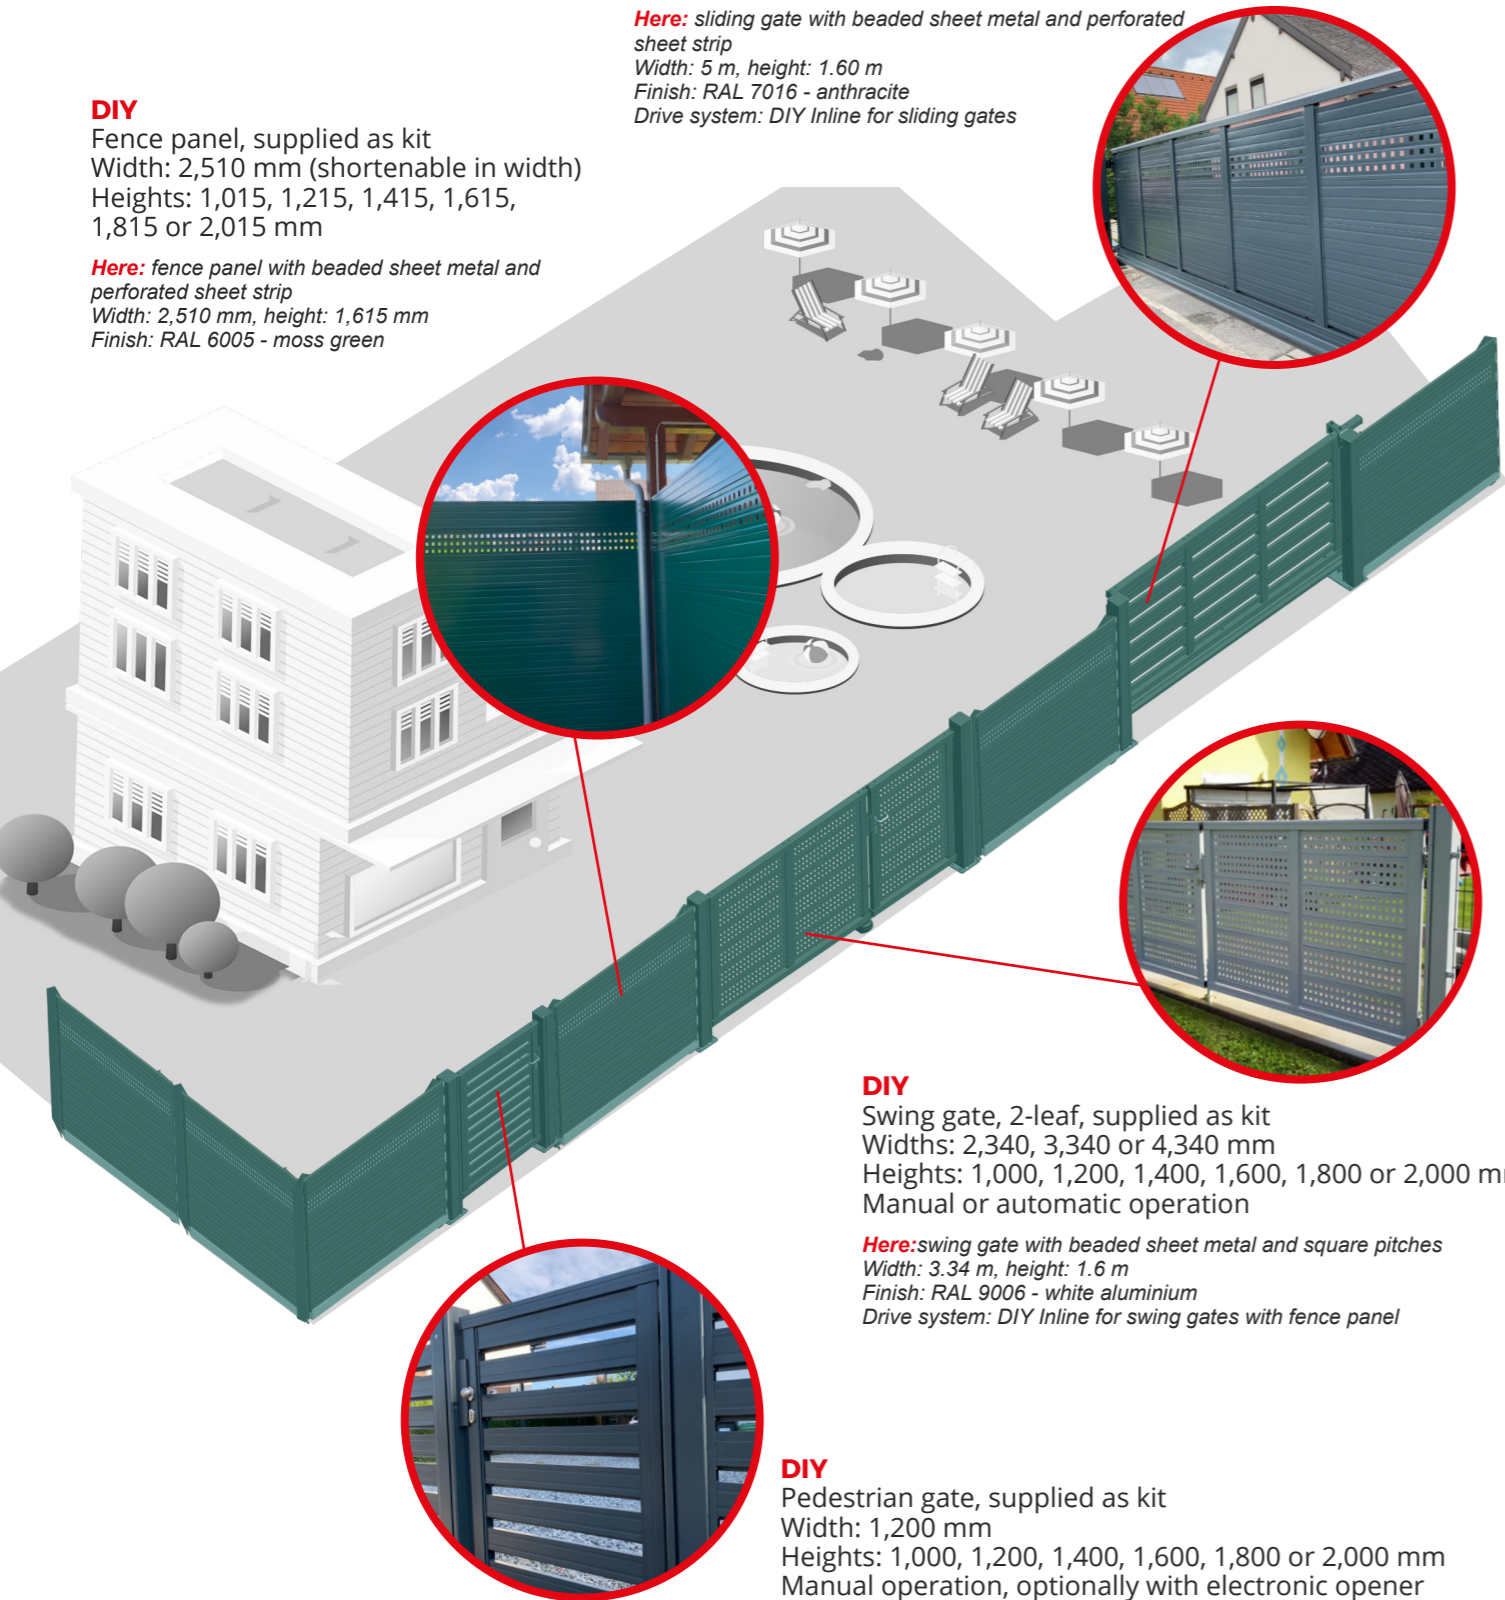**DIY**

Swing gate, 2-leaf, supplied as kit
Widths: 2,340, 3,340 or 4,340 mm
Heights: 1,000, 1,200, 1,400, 1,600, 1,800 or 2,000 mm
Manual or automatic operation

Here: swing gate with beaded sheet metal and square pitches
Width: 3.34 m, height: 1.6 m
Finish: RAL 9006 - white aluminium
Drive system: DIY Inline for swing gates with fence panel

DIY

Pedestrian gate, supplied as kit
Width: 1,200 mm
Heights: 1,000, 1,200, 1,400, 1,600, 1,800 or 2,000 mm
Manual operation, optionally with electronic opener

Here: pedestrian gate with horizontal slat 100
Width: 1.2 m, height: 1.6 m
Finish: RAL 7016 anthracite

Individuality



Design

Round or square shapes, style and modern materials such as corten steel and glass: Gates with character are real eye-catchers. Our engineering team manages the technical implementation of all customer-specific requirements. Exquisite accessories such as illumination with LED lighting and individual logos transform each gate into a unique masterpiece.



Security and Safety

All systems are manufactured in accordance with the latest CE mark requirements and the product standard for powered doors and gates EN 13241-1. Our automatic sets include all required safety devices. In particularly sensitive areas, additional accessories are available, such as the HÖRMANN PRO Safety Plus, a non-pressure sensitive safety contact edge that detects any potential obstructions early before a collision.

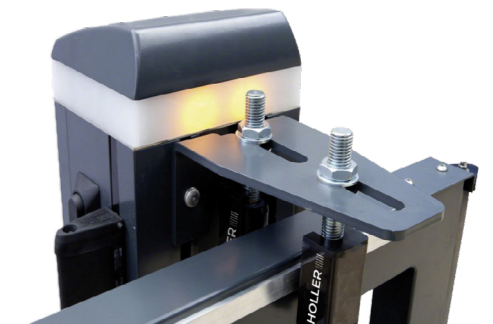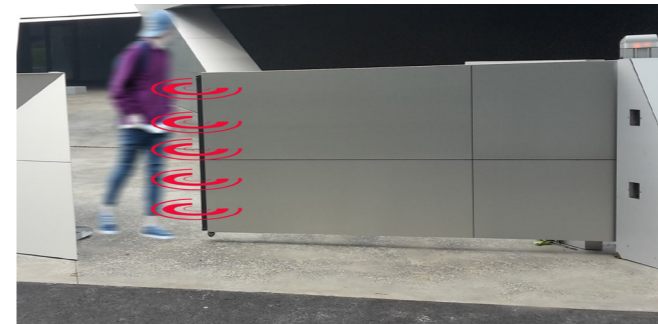

Functionality

Our product range includes numerous modern and "smart" solutions such as position controls, home automation and operation with mobile phones via GSM. We also provide "classic" solutions such as remote control, key switch and combination locks.



HÖRMANN

powered by

HOLLER |||||
GATES - FENCES - AUTOMATION

Your local partner